
VACU-STACK® SPECIFICATIONS

VCCU-Stack Model VSS-TDW WITH SCREEN

Application: For double wall or triple wall round, air cooled chimneys. This is the premier cap for solving common wind-related chimney draft problems caused by conditions such as hills and mountains in the vicinity, tall trees near the chimney, or tall buildings nearby.

Standard Materials: 100% austenitic stainless steel, stainless steel screen.

Alternate materials: Copper (Model VSC-TDW) and Type 316 stainless steel (Model VSM-TDW) for marine environments.

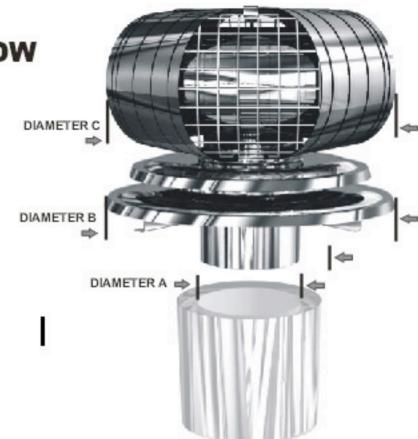

| MODEL # (1" SCREEN OPENING*) | MODEL # (1/2" SCREEN OPENING*) | (INCHES) | | | SHIPPING WEIGHT |
|------------------------------------|--------------------------------------|----------|----|----|--------------------|
| | | A ` | В | C | (POUNDS) |
| VSS-6-TDW-S | VSS-6-TDW-S5 | 6 | 16 | 14 | 8.5 |
| VSS-7-TDW-S | VSS-7-TDW-S5 | 7 | 16 | 15 | 8.5 |
| VSS-8-TDW-S | VSS-8-TDW-S5 | 8 | 16 | 18 | 11 |
| VSS-9-TDW-S | VSS-9-TDW-S5 | 9 | 16 | 20 | 11 |
| VSS-9.5-TDW-S | VSS-9.5-TDW-S5 | 9.5 | 16 | 20 | 11 |
| VSS-10-TDW-S | VSS-10-TDW-S5 | 10 | 16 | 21 | 15 |
| VSS-11-TDW-S | VSS-11-TDW-S5 | 11 | 19 | 23 | 19 |
| VSS-11.5-TDW-S | VSS-11.5-TDW-S5 | 11.5 | 19 | 24 | 19 |
| VSS-12-TDW-S | VSS-12-TDW-S5 | 12 | 19 | 24 | 19 |
| VSS-13-TDW-S | VSS-13-TDW-S5 | 13 | 19 | 28 | 45 |
| VSS-14-TDW-S | VSS-14-TDW-S5 | 14 | 19 | 30 | 45 |

SIZES: Custom sizes available up to 48". Call for price and specific requirements.

CHIMNEY TYPES: Double wall or triple wall round, air cooled.

SCREENS: Available as noted above in 1" and 1/2" mesh openings. Check local regulations for what is required in your area.

OVERSIZE: Oversize lids and bases available. Call us to discuss pricing and specific requirements.



^{*} Nominal dimension